



Company Profile



FACTORY



CONTENTS

1. Introduction (Who We Are)	Page 1
2. Specializations	Page 2
3. Vision & Mission	Page 3
4. Products	Page 4
4.1 Garage Rolling Doors	Page 5
4.2 Industrial Rolling Doors	Page 6
4.3 Industrial Shutter Doors	Page 7
4.4 Insulated Shutters	Page 8
4.5 Curved Slats	Page 9
4.6 Industrial Shutter	Page 11
4.7 Insulated Rolling Shutter	Page 14
4.8 Grill Shutter Doors	Page 16
4.9 Window Shutter	Page 18
4.10 Overhead & Sectional Doors	Page 19
4.11 Polycarbonate Doors	Page 21
4.12 Swing Gates	Page 24
4.13 Double leaf glass Doors	Page 27
4.14 Hollow Metal Doors	Page 30
4.15 Electronic Parking Barriers	Page 31
4.16 Central Motor for Rolling & Grill Shutter	Page 32
4.17 Side Motor - Single/Three Phase	Page 33
5. Clients	Page 35 - Page 36
6. Brands	Page 37
7. Services	Page 38

Who We Are

من نحن

شركة إيليت في المملكة العربية السعودية

للحصول على أبواب أوتوماتيكية عالية الجودة، مع خدمات التركيب بدقة واحترافية عالية وأسعار تنافسية مع فريق متخصص يتمتع بخبرة طويلة ومهارات فنية عالية، فإن شركة إيليت هي الخيار الأمثل. تضمن لك شركة إيليت تنفيذ سلس وسريع لجميع مراحل التركيب والصيانة، مع الحفاظ الكامل على أعلى معايير الجودة

Elite Company in the Kingdom of Saudi Arabia

For high-quality automatic doors, with precise and highly professional installation services at competitive prices, and a specialized team with extensive experience and advanced technical skills — Elite Company is the ideal choice. Elite guarantees smooth and fast execution of all installation and maintenance stages, while fully maintaining the highest standards of quality.



رؤيتنا Vision

أن تصبح الشركة الرائدة في المملكة العربية السعودية، في مجال تنفيذ الأبواب الأوتوماتيكية، وتلبية كافة الخدمات المتعلقة بها، بجودة، وسرعة، واحترافية.

To become the leading company in the Kingdom of Saudi Arabia in the field of manufacturing of automatic doors, and in providing all related services with quality, speed, and professionalism."



رسالتنا Mission

أن نلبي احتياج عملائنا لتسهيل أعمالهم، بأبواب أوتوماتيكية مريحة، يتم توريدها، وتنفيذها، وتركيبها، وصيانتها بكفاءة، ودقة، وأسعار تنافسية

To meet our clients' needs by facilitating their operations with comfortable automatic doors that are supplied, implemented, installed, and maintained with efficiency, precision, and competitive pricing

Why Elite ?

بماذا نتميز ؟

سرعة الانجاز في التوريد والتنفيذ، والتركيب
Fast Turnaround

02

جودة المواد المستخدمة في تصنيع الأبواب
High Quality and Durable Materials

01

03

تقديم أسعار تنافسية
Competitive Prices

04

خبرة ومهارة فريق العمل
Skilled Technicians

03

توفير خدمة الصيانة باحترافية خلال ٢٤ ساعة
After Sales Support Within 24 Hours

05



Elite Company
Products

منتجات

شركة

إيلايت

أبواب الرول السحابة

أبواب شركة إيليت السحابة تتميز بـ

- مصنعة من الحديد الممزوج بالألومنيوم Unicoil المطلي حرارياً
- ذو سماكة ٠,٤٥ مم - ٠,٦ مم - ٠,٨ مم
- يوجد ألوان ذات مواصفات عالية خشابي برونزي ، بيج ، أزرق ، أبيض ، رصاصي
- يوجد حاجز مطاطي أسفل الباب يمنع دخول الأتربة والحشرات
- الكهرباء ١٠ الف - ٢٢٠ - ٦٠/٥٠ سيكل عند القطاع التيار يتم تحويل الباب يدوياً

شكل الانسيابي و تحمل الضغط

مقاوم للصدا و الظروف الجوية الأخرى

متوفرة بجميع المقاسات حتى ٥,٢٠ م عرض وارتفاع ٥,٥٠ م

يوجد نظام أمان متطور يرتد الباب مباشرة عند ملامسته أي جسم

يحتوي على شريط جانبي الباب يجعل الباب ينزلق بسهولة و هدوء

Garage Rolling Doors

Elite doors are characterized by smoothness and pressure bearing. They are of aluminum alloy coated with stainless steel aluminum and other weather conditions with a thickness of 0.45 mm, 0.6 mm, Available in all sizes there are colour.


with high specifications Wood, Bronze, Beige, Blue, White, Grey, There is sophisticated safety system that returns the door directly when it touches any body then a rubber barrier under the door prevents the entry of dust and insects. Elite doors doesn't need to maintain the life span and because of the tape on both sides of the door makes the slip easily and soundless of electricity 110 P-220 P-50/60 Sickle when power is turned on the door is manually opened by the handle.



Herculift



LiftMaster



Fresh Conting
Primer Coating
Chemical Prybeast
Al-Zn Coating 50%
Cold Rolled Stre
AlZn Coating 50%
Chemical Pretreatment
Service Coating



A04 - 160



A04 - 145



A04 - 180



A04 - 200



الأبواب الصناعية السحاب

أبواب شركة إيليت الصناعية تتميز بـ

- مصنعة من الحديد المميز بالألومنيوم Unicoil المطلي
- ذو سماكة ٠.٧ مم
- يوجد ألوان ذات مواصفات عالية (بـ أزرق , أبيض , رمادي
- يوجد حاجز مطاطي أسفل الباب يمنع دخ الأتربة والحشرات
- الكهرباء الف - ٢٢٠ ف - ٥٠/٦٠ سيكل عند إنقطاع التيار يتم تحويل الباب يدونا عن طريق الهاندل
- الشكل الانسيابي و تحمل الضغط
- مقاوم للصدأ و الطرود الجوية الأخرى
- مقاوم للصدأ و الطرود الجوية الأخرى
- متوفرة بجميع المقاسات حتى ٦ عرض وارتفاع ٥,٥٠ م
- يوجد نظام أمان متطور يرتد الباب مباشرة عند ملامسة أي جسم
- تحتوي على شريط على جانبي الباب يجعل الباب ينزلق بسهولة و هدوء

Industrial Rolling Doors

Elite doors are characterized by smoothness and pressure bearing. They are made of aluminum alloy coated with stainless steel aluminum and other weather conditions with a thickness of 0.45 mm, 0.5 mm 0.6 mm. Available in all sizes. There are colors with high specifications Wood, Bronze, Beige, Blue, White, Grey,. There is a sophisticated safety system that returns the door directly when it touches any body. There is a rubber barrier under the door prevents the entry of dust and insects. Elite doors doesn't need to maintain the life span and because of the tape on both sides of the door makes the door slip easily and quietness of electricity 110 P - 220 P - 5060/ Sickle. When the power is turned off the door is manually opened by the handle



أبواب السحاب الصناعية

أبواب الشتر السادة المخزومة

هذه أبواب مناسبة للمحلات والمراكز التجارية للمستودعات لما تعطي من الحماية وتمتاز هذه الأبواب بالقوة والألوان المتعددة وسهولة التركيب وسهولة الصيانة مع إمكانية تركيب موتور سنتر إيطالي أو موتور جانبي أو سلسلة يدوية حيث أن صناعة الأبواب الشتر من أهم أولويات مصنع إيليت فنجد هذه الصناعة تتم بأجود المواد الخام من الحديد المجلفن و الشرائح السمكية التي تصل لسماكة تتراوح بين 0.8 مم الي 1.00 مم سماكة الشريحة كما أن مجاري الأبواب مصنعه من الحديد المجلفن وجهاز تشغيل الباب متوفر بمقاسات تتناسب مع مساحة الباب

عدد أنواع الأبواب الشتر وهي كالآتي:

07

Industrial Shutter Doors

These doors are suitable for shops, commercial centers, and warehouses due to the protection they provide. They are characterized by Strength and durability, a variety of colors, easy installation and simple maintenance. They can be equipped with a central Italian motor, a side motor, or a manual chain system. • The manufacturing of shutter doors is one of the top priorities of Elite Factory, and this industry is carried out using the finest raw materials, including: Galvanized iron, thick slats with thickness ranging from 0.8 mm to 1.00 mm, Door tracks made from galvanized iron. Door operating systems available in sizes that match the door dimensions.

THE NUMBER OF TYPES OF SHUTTER DOORS IS AS FOLLOWS:

Insulated Shutters (Stainless Steel)

Specification

Curtain:

Interlocking Hat profile slats thickness 0.8mm produced from stainless steel Interlocking Flat profile perforated slats thickness 0.8mm produced from stainless steel Size of perforated whole 2.5mm

End clips: Slates are sec

Are secured in the position by nylon end clips on the alternatives which stop them from moving sideways. therefore preventing the curtain from lateral movement

Bottom Rail:

The bottom rail is fabricated from double stainless steel angle size 40x40x4 mm, 50x50x5mm thick (its depend on the door size). with vinyl astragal Bottom bat provide reinforcement to bottom fo curtain

Guides:

Produced from 2mm thick steel strip. hot dipped galvanized and cold formed into channel U section 60mm x 30mm, 100mm x30mm (its depend on the size door)

Axle and Drum (Center Motor):

Asde shall be a steel pipe 60mm or 76mm (its depend on the size door) to ensure a rigid structure to give a high factor of operating safety and minimum defecation

Shaft (Side Motor)

Using barrel 133mm x 4mm 300mm x 6mm (its depend on the size door) to give high factor of operating safety of and minimum deflection

Brackets

Galvanized steel plate of size 400mm x400mm x 4mm thickness is used to make bracket. This bracket holds dangle along with (central motor). Made up of 3mm thickness of size 4450mm L x 425mm H with two gusset plates. This gives stability to the bracket. Also for door bigger than 6 meter the bracket of size 570mm L x 560mm H with thickness of 5mm used. This bracket has two gusset plates to give stability. The brackets are of steel with powder coating done (Side Motor-Si) Brackets are made of mild steel plates, 515x300x3.5mm, 580x320x4mm thick (Its depends on the door size) these brackets support the drum and curtain assembly which are attached to the inside wall of the building. Brackets are factory painted with under primer to protect from corrosion. (Rollc Motor).



Insulated Shutters (Aluminum)

Specification

Curtain:

Interlocking Hat profile slats thickness 1.2mm produced from Aluminum Interlocking Flat profile perforated slats thickness 1.2mm produced from aluminium Size of perforated whole 3.0mm

End clips: Slates are sec

are secured in the position by nylon end clips on the alternatives which stop them frons moving sideways, therefore preventing the curtain from lateral movement

Bottom Rail:

The bottom rail is fabricated from double Aluminum angle size 40x40x4mm 50x50x5mm thick (Its depend on the door size), with vinyl astragal Bottom bar provide reinforcemern to bottom of curtain

Guides:

Produced from 2mm thick steel strip, hot dipped galvanized and cold formed into channel U section 60mm x 30mm, 100mm x 30mm (Its depend on the size door)

Axle and Drum (Center Motor):

Asde shall be a steel pipe 60mm or 76mm (its Depend on the size door) to ensure a rigid structure to give a high factor of operating safety and minimum deflection

Shaft (Side Motor)


Using barrel 133mm x 4mm 300mm x 6mm (lis depends on the door size) to give high factor of operating safety and minimum deflection

Brackets

Galvanized steel plate of size 400mm x400mm x 4mm thickness is used to make bracket. This bracket holds dangle along with (central motor). Made up of 3mm thickness of size 4450mm L x 425mm H with two gusset plates. This gives stability to the bracket. Also for door bigger than 6 meter the bracket of size 570mm L x 560mm H with thickness of 5mm used. This bracket has two gusset plates to give stability. The brackets are of steel with powder coating done (Side Motor-Si) Brackets are made of mild steel plates, 515x300x3.5mm, 580x320x4mm thick (Its depends on the door size) these brackets support the drum and curtain assembly which are attached to the inside wall of the building. Brackets are factory painted with under primer to protect from corrosion. (Rollc Motor).



Curved Slats

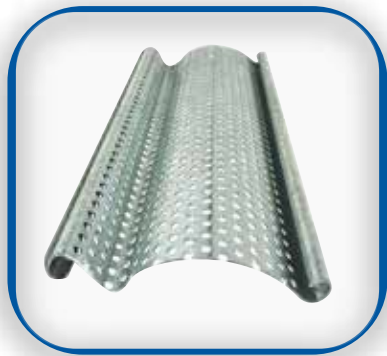

Specification

Curtain:

Interlocking Curved profile slats thick up to 1.2mm produced from galvanized, zinc coated cold rolled slats
Interlocking Curved profile perforated slats thick up to 1 mm produced from galvanized, zinc coated rolled steel . Size of perforated whole 2.5mm or 3.0 mm

End clips

Slates are secured in the position by nylon end clips on the alternatives which stop them from more sideways, therefore preventing the curtain from lateral movement.

Bottom Rail

The Bottom rail is fabricated from double steel angle size 40x40x4mm, 50x50x5mm thick (its depend on the door size),

Guides:

Produced from 2mm thick steel strip, hot dipped galvanized and cold formed into channel U section 60mm x 30mm, 100mm x 30mm, (Its depend on the size door)

Axle and Drum (Center Motor):

Axle shall be a steel pipe 60mm or 76mm (its Depend on the size door) to ensure a rigid structure to give a high factor of operating safety and minimum deflection

Shaft (Side Motor)






Using barrel 133mm x 4mm, 300mm x 6mm (Its depends on the door size) to give high factor of operating safety and minimum deflection.

Brackets

Galvanized steel plate of size 400mm x400mm x 4mm thickness is used to make bracket. 425mm H with two gusset plates. This gives This bracket holds dangle along with (central motor). Made up of 3mm thickness of size 445mm L x stability to the bracket. Also for door bigger than 6 meter the bracket of size 570mm L x 560mm H with thickness of 5mm used. This bracket has two gusset plates to give stability
The brackets are of steel with powder coating done (Side Motor) Brackets are made of mild steel plates, 515x300x3.5mm, 580x320x4mm thick..... (Its depends on the door size).

These brackets support the drum and curtain assembly which are attached to the inside wall of the building.
Brackets are factory painted with under primer to protect from corrosion.

Product Drawings

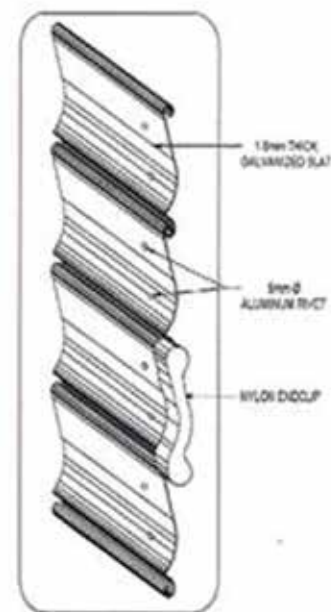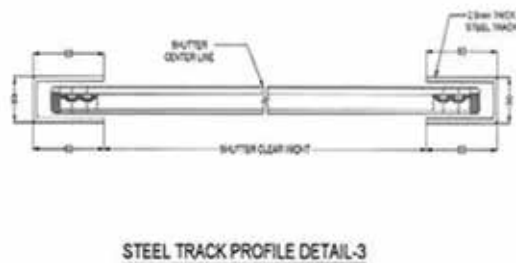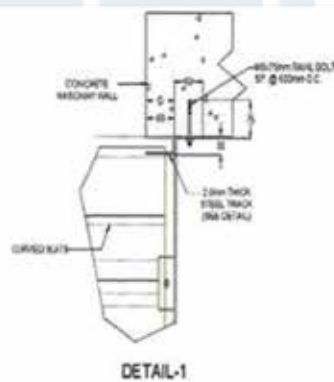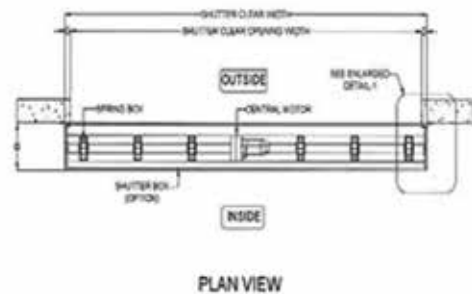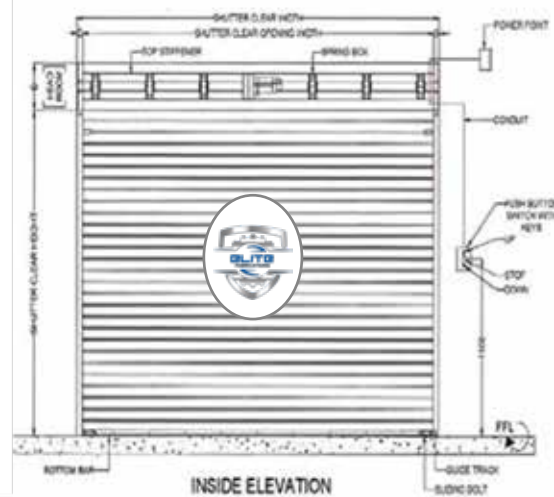

DOOR NO.	QTY.	CLEAR OPENING		OPERATION	POWER SUPPLY
		W (mm)	H (mm)		
Db	n	X	Y	CENTRAL MOTOR	230 V, SINGLE PHASE, 60Hz

Specification

Curtain:

Interlocking curved continues profile slats thickness 1.0mm thick, produced from galvanized steel, powder coated.

End clips:

End clips produced from cast iron to secure the slats in position. End clips are fixed on alternate slats to stop the slats moving sideways, which therefore prevents the curtain from lateral movement.

Bottom Rail:

The bottom rail is fabricated from double steel angle size 50x50x5mm thick. Bottom bar provide reinforcement to bottom of curtain.

Guides:

Manufactured from 3 galvanized steel angles size: 65x65x5 mm 65x65x5 mm 80x75x5 mm

Shaft (Side Motor):

Using barrel 133mm x 4mm 300mm x 6mm, (Its depends on the door size) to give high factor of operating safety and minimum deflection.

Brackets:


Made up of 8mm to 10mm thick mild steel plates, 500mm X 500 mm 600mm x 600mm and is folded to form a 100mm, foot at right angle to remaining area. These brackets support the drum and curtain assembly and are attached to the inside wall of the building, provided drive gears ends to suit the type and arrangement of the roller shutter. Brackets are factory prime painted with zinc chromate coating to provide corrosion protection.

RAL COLOR:

Using RAL colors to specific customer requirements (option)

Hood:

Hood cover of 0.6mm to 0.8mm thickness rectangular or round shape is fitted on the brackets to protect the shaft assembly from weathering



أبواب شتر

مقاومة للحريق لمدة ساعتين





تتميز هذه الأبواب

- المتانة فهي مصنوعة من الحديد المجلفن المعزول أو الألومنيوم المطلي بدهان ضد الحريق
- مقاومة للصدأ • سماكة تتراوح بين ٠,٦٠ إلى ٠,٨٠
- معزولة بمادة البولي إيثيرين أو الصوف الصخري المقاوم للحريق
- مثبت على أطراف الشرائح نهايات من الألمنيوم لضمان سهولة الحركة وعدم خروج الشرائح من مسارها
- جميع الألوان متاحة مع وجود جبهة سفلية
- أقفال جانبية لأعطاء أكثر أمان للعميل

Industrial Shutter

These insulated doors are durable. They are made of galvanized iron painted with a thermal paint with a thickness ranging from 0.6 to 0.8, made of two ethers and painted with brown paint. Door fastener. Plastic inner side shoulders for easy sliding. All colors are available with a bottom rail and side locks to give the customer more safety.

Product Drawings

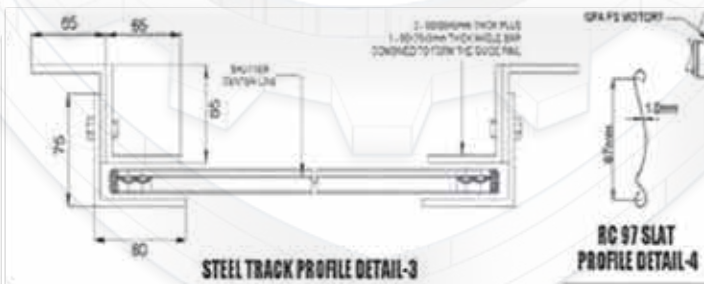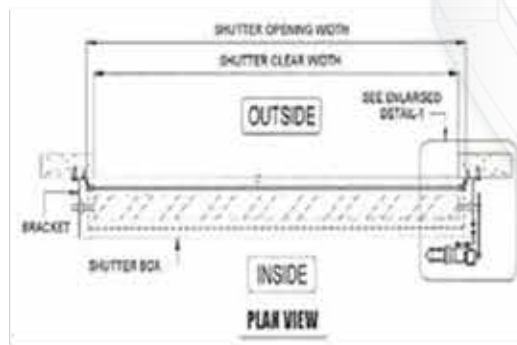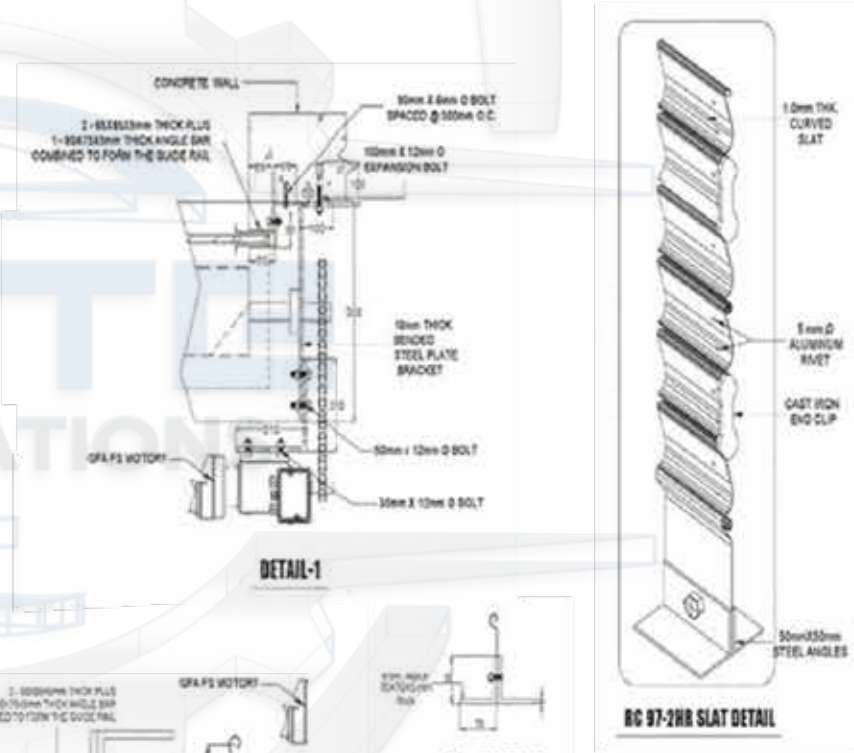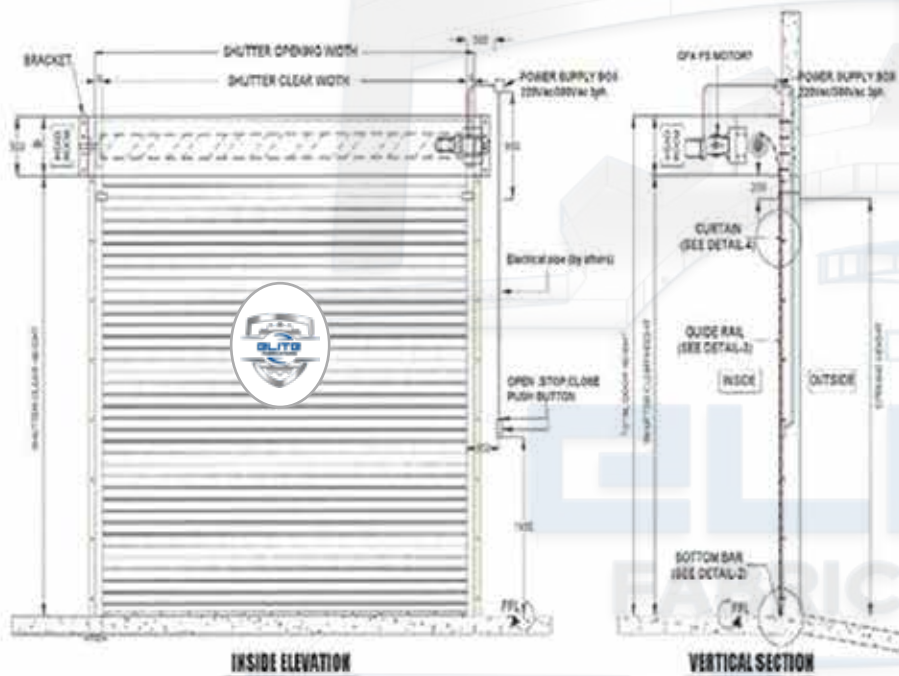

DOOR NO.	QTY	CLEAR OPENING		OPERATION	POWER SUPPLY
		W (mm)	H (mm)		
Dr	n	X	Y	SIDE MOTOR GFA - PST	220 / 400V, 3Phase, 50 Hz

أبواب الشتر الصناعية المعزولة

المواصفات القياسية

الشرائح : تصنع أبواب الشتر من شرائح مسطحة من الفولاذ المجلفن بعرض ٧٧ مم الشرائح ذات مقطع مقوس بارتفاع/عرض ٧٥ مم ، متشابكة بشكل مستمر. يتم حقن كل شريحة بمادة البولي يوريثان . يبلغ سمك الشريحة ٢١ مم من الطبقة الخارجية **النهايات الجانبية :** تصنع النهايات الجانبية من حديد الزهر أو البلاستيك لتثبيت الشرائح في مكانها. يتم تثبيت النهايات على شرائح متبادلة لمنع حركة الشرائح الجانبية، مما يمنع الشرائح من التحرك جانبياً

الجهة السفلية : تصنع الجهة السفلية من زوايا فولاذية مزدوجة بمقاسات ٤٠*٤٠*٤ مم الجهة السفلية أو ٥٠ × ٥٠ × ٥ مم (حسب حجم الباب) توفر الجهة السفلية الدعم للشرائح **المجاري :** تصنع من شرائح فولاذية بسماكة ٢ مم، مجلفنة ومشكّلة على البارد على شكل مقطع U بقياسات: ٦٠ مم × ٣٠ مم ، أو ١٠٠ مم × ٣٠ مم (حسب حجم الباب) **المحور والماسورة (محرك مركزي) :** المحور عبارة عن أبواب فولاذي بقطر ٦٠ مم (أو ٧٦ مم) (حسب حجم الباب)، لضمان بنية طلبة توفر عاملاً عالياً لمانع تقليل الانحناء

الحوامل : تصنع الحوامل من صفائح فولاذية مجلفنة بقياس ٤٠٠ مم × ٤٠٠ مم وسماكة ٣ مم لدعم التشغيل . ولأبواب أكبر، يتم استخدام صفائح بقياس ٤٤٥ مم × ٤٢٥ مم مع صفيحتين داعمتين بواب أكبر، يتم استخدام حوامل بقياس ٥٧٠ مم × ٥٦٠ مم مع سماكة ٥ مم . تحتوي هذه الحوامل على أضلاع لتقوية الاستقرار. تصنع الحوامل من الفولاذ المطلي بالمسحوق لمحركات الجانب وتكون مقاساتها مم (حسب حجم الباب). يتم تثبيت الحوامل مع محور وطلون الباب داخل الجدار. يتم تصنيع الحوامل بمادة أولية مجلفنة ومطلية لمنع التآكل. (محرك ملفوف



Standard Specification

Insulated Rolling Shutter

Curtain:

Rolling Shutters are constructed from 77 mm height flat/75 height curved section continuously interlocked galvanized steel flat section slats, which are held securely in position by end clips. Each slat is injected with polyurethane. The thickness 21mm from outer sheet

End clips

End clips produced from cast iron to secure the slats in position. End clips are fixed on alternate slats to stop the slats moving sideways, which therefore prevents the curtain from lateral movement.

Bottom Rail

The bottom rail is fabricated from double steel angle size 40x40x4mm, 50x50x5mm thick... (Its depend on the door size). Bottom bar provide enforcement to bottom of curtain.

Guides:

Produced from 2mm thick steel strip, hot dipped galvanized and cold formed into channel U section 60mm x 30mm, 100mm x 30mm, (Its depend on the size door)

Axle and Drum (Center Motor):



Axle shall be a steel pipe 60mm or 76mm (its Depend on the size door) to ensure a rigid structure to give a high factor of operating safety and minimum deflection

Shaft (Side Motor)


Using barrel 168mm x 5mm, 300mm x 6mm (Its depends on the door size) to give high factor of operating safety and minimum deflection.

Brackets

Galvanized steel plate of size 400mm x 400mm x 4mm thickness is used to make bracket. This bracket holds dangle along with central motor Made up of 3mm thickness of size 445mm L x 425mm H with two gusset plates. This gives ability to the bracket. Also for door bigger than 6 meter the bracket of size 570mm L x 560mm H with thickness of mm used. This bracket has two gusset plates to give stability. The brackets are of steel with powder coating done (Side Motor) Brackets are made of mild steel plates, 515x300x3.5mm, 580x320x4mm thick (Its depends on the door size) these brackets support the drum and curtain assembly which are attached to the inside wall of the building. Brackets are factory painted with under primer to protect from corrosion. (Roll Motor).

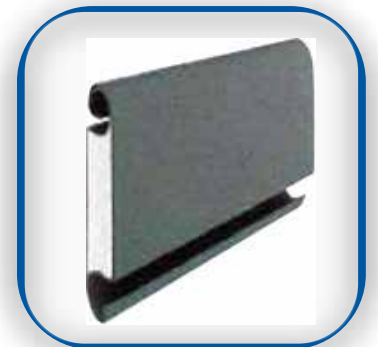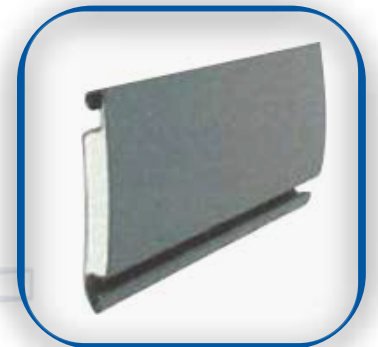

Product Drawings

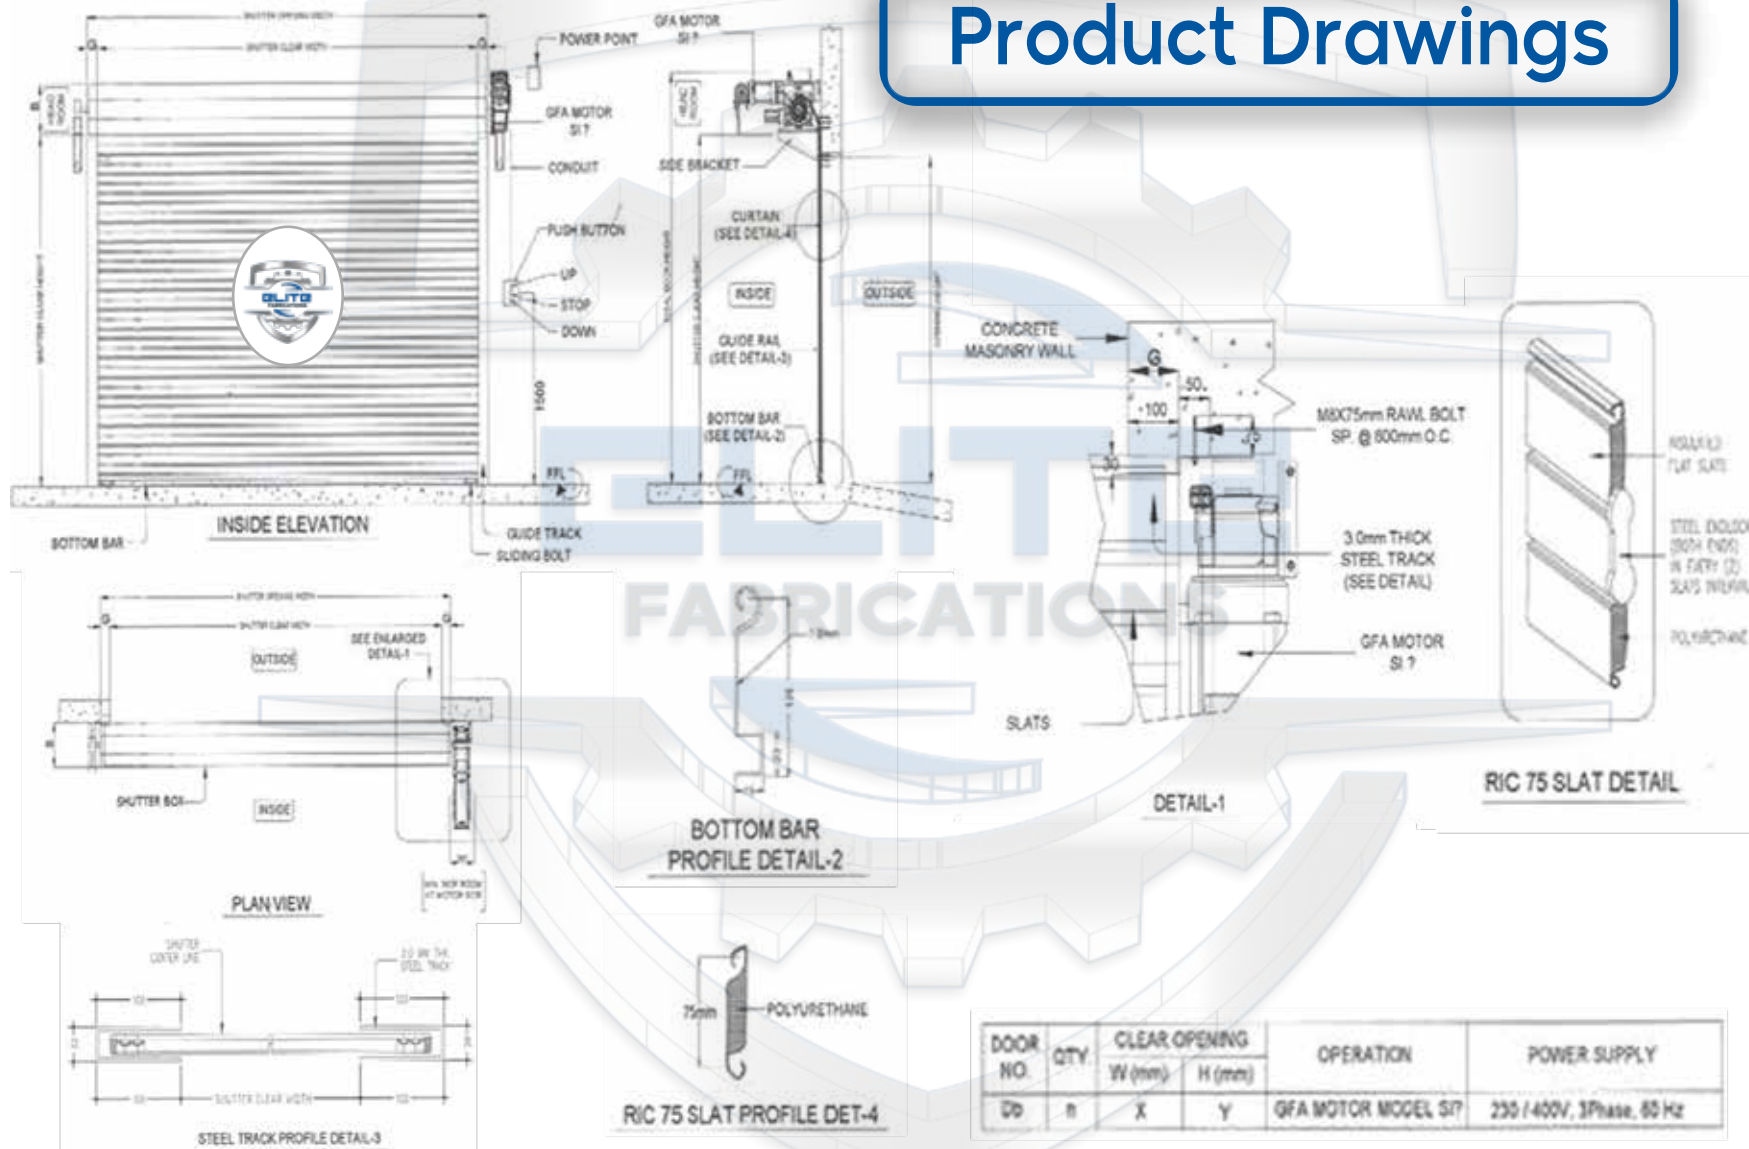

أبواب الشبك والقضبان المتشابك Grill Shutter doors

أبواب الشبك الأوتوماتيكية


من أفضل ما استخدم في مجال أبواب المعارض والمراكز التجارية لما توفره من :

- أمان وكذلك ديكور خارجي لشكله الجميل • يتيح للناس الرؤية من الخارج
- مصنوع من قضبان معدنية مجلفنة ومتشابكة معاً بسماكة 16
- تشكل مساحة رائعة من التصميم الخارجي • مقاوم للصدأ والأحوال الجوية
- تمتاز بإمكانية طلائها بألوان مختلفة تناسب الديكور الداخلي
- استخدام أبواب الشبك أوتوماتيكياً أويديوا
- يتم استخدام نوعين من المحركات لتشغيل أبواب الشبك وذلك حسب الموقع ورغبة العميل نفسه




Automatic Grill Shutter Doors

The mesh doors or interlocking rails or pylons are the best used in the field of exhibition doors and commercial centers because of its safety and also the external decoration of the beautiful shape, which allows people to see Made of galvanized metal rods and interlocked to form a wonderful area of exterior design stainless And weather conditions and rain can be painted in colors suitable for the interior decoration the use of the doors of the nets automatically and Oidouia with different spaces of the doors - Two types of engines are used to operate the doors of the network, depending on the location and installation condition and the desire of the customer himself

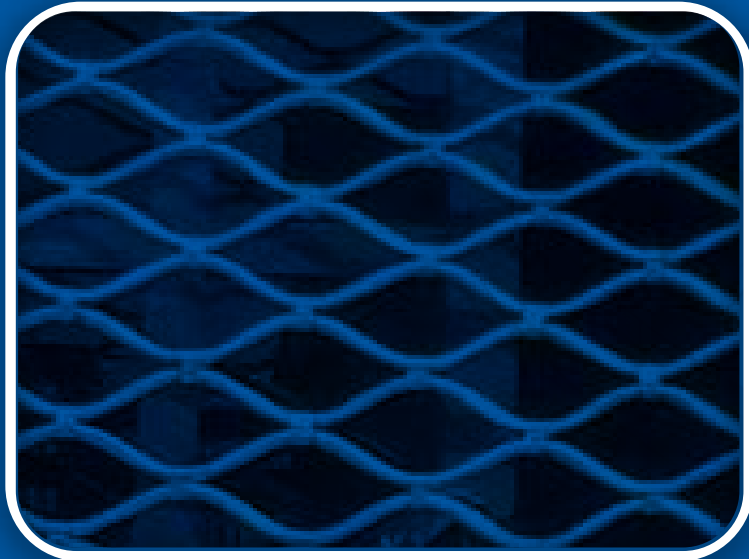

Product Drawings

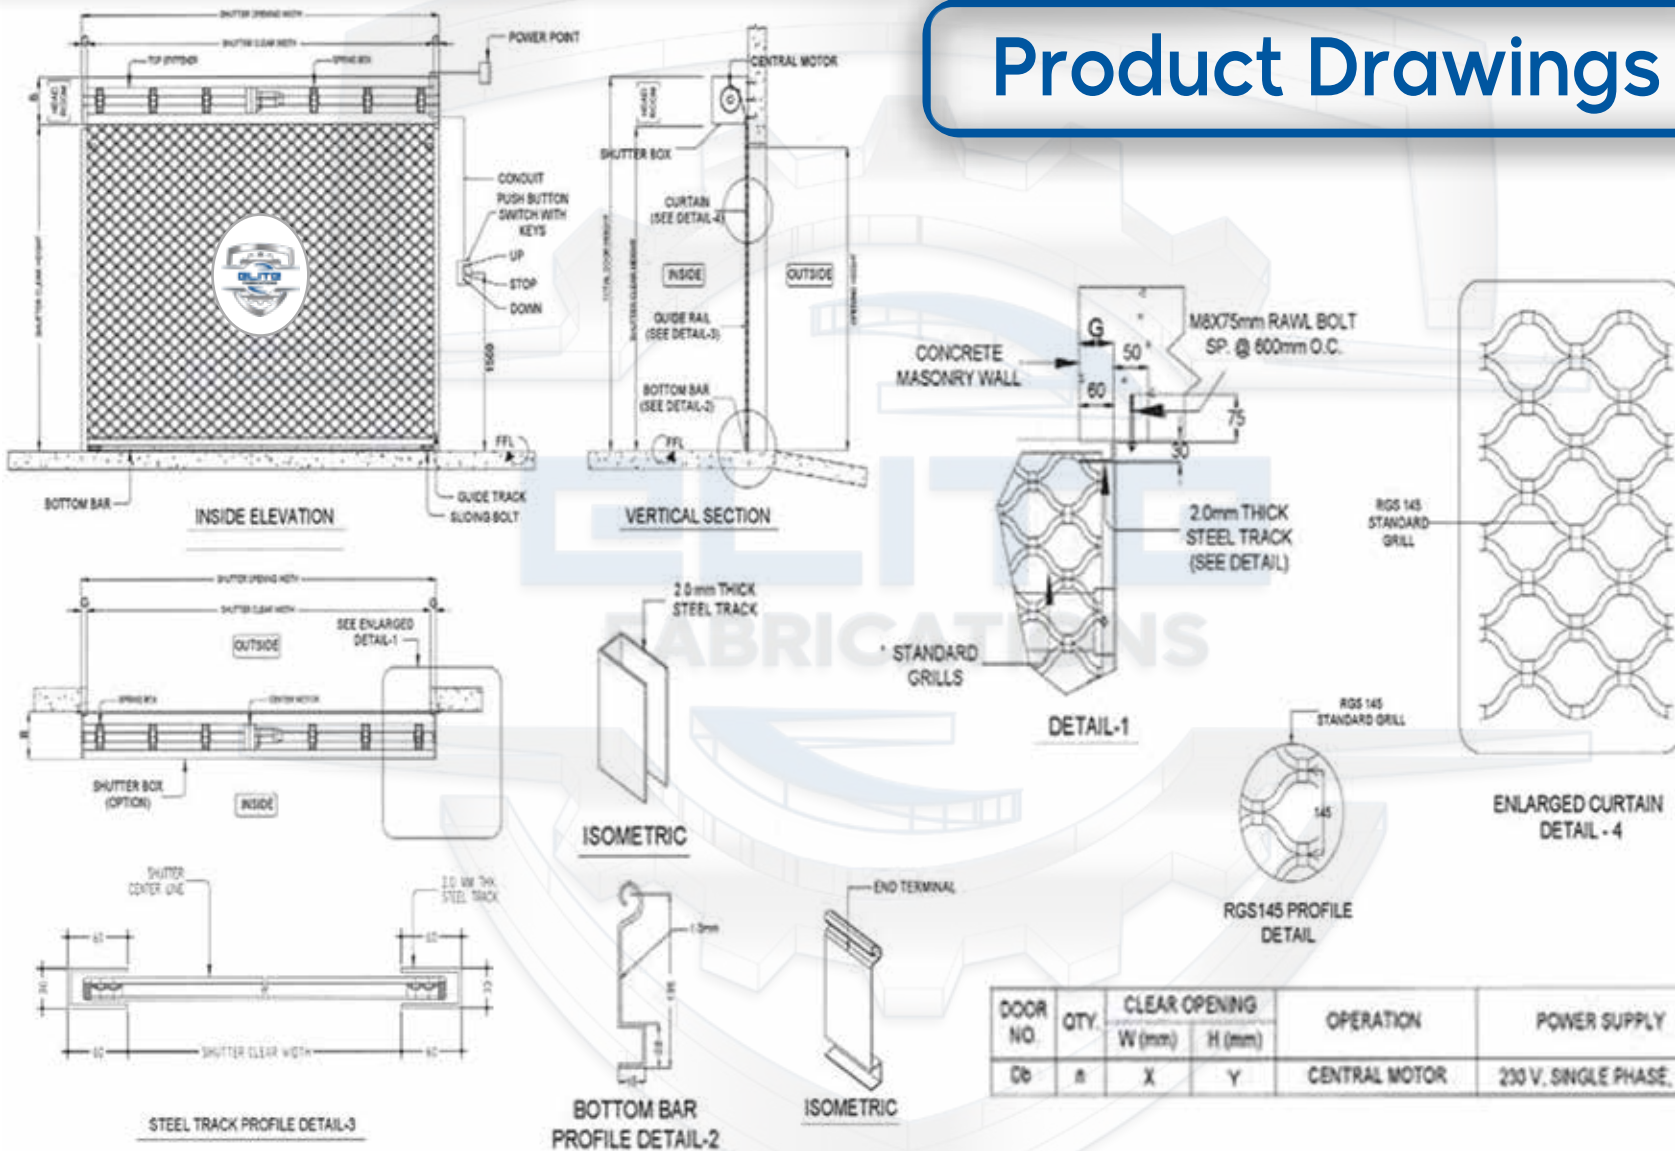



ستائر النوافذ المعدنية


التميز لدى ستائر ايليت أنها :

- تحمي المنزل من الغبار والحشرات • تزيد من مستوي الخصوصية
- تمنع الضوء و الحرارة • لها منظر جمالي و إنسيابي و أمان
- يتم عمل شرائح لأبواب المحلات والمراكز التجارية
- يوجد نوعان من الشرائح المعدنية للستائر ٤سم ارتفاع الشريحة و ٦سم الشريحة المعزولة
- تمتاز بكفاءة العزل و خفة الوزن • تمتاز بالأمان العالي
- تتوفر بأربعة ألوان أساسية ويمكن اختيار أي لون مناسب لديكور المنزل
- جميع النوافذ الكهربائية بموتور سومفي صناعة فرنسية
- أو موتور نايس صناعة إيطالية وضمان خمس سنوات

Window Shutter

Elite Doors Factory has automatic doors that protect the house from dust and insects and increase the level of privacy and prevention of light and heat, which leads to the provision of energy consumption and noise reduction are available in two types of shops are also made to shop doors and commercial centers of money from the aesthetic and smooth view and safety of the slides:

There are two types of metal slides for curtains 4 cm slide height & 6 cm Insulated chip is characterized by efficient isolation and low weight. The slide with high security features is available in four basic colors and any color can be selected for home decoration. All the electric windows in the French-made Somfy Motor with a guarantee of five years.

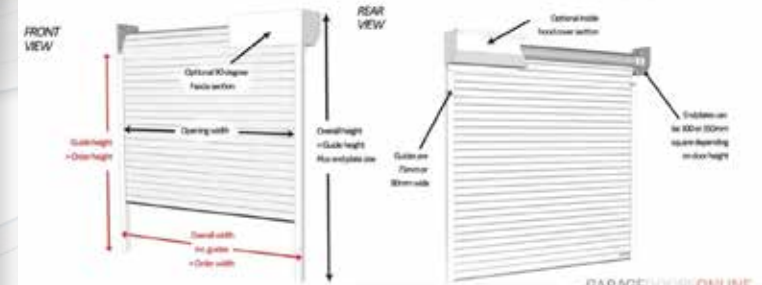

أبواب القطع المنزلقة والبانوراما

أبواب الكراجات الأمريكية - أبواب القطع المنزلقة

تصميم هذا الباب يكون عبارة عن ألواح طولية أو شرائح متلاحمة ومصطفة بجانب بعضها البعض وتثبت عادة على مسارات بالسقف والرضية تسمح لها بالانزلاق

أبواب البانوراما التجارية

أبواب الكراجات لمينوم الصناعية قوية و جذابه و يمكن أن توفر قدر من الرؤية عند الحاجة، وتستخدم أيضا كمثال على ذلك في مراكز إطفاء ومراكز الخدمة الذاتية للسيارات محطات الوقود للسيارات إطارات أبواب قياسية متوفرة بعدة ألوان حسب الطلب تشطيبات برونزية اختيارية الزجاج القياسي زجاج ملون أو شفاف تتوفر معظم أنواع التشطيبات المقطع للباب سماكة 0 سم

Overhead & Sectional Doors


The design of this section is a longitudinal or interlocking slab, lined up next to each other and usually fixed on the roof and floor paths that allow it to slide. These types of doors are stylish options that give plenty to your garage body.

Commercial Type panorama

Industrial Aluminum garage doors are strong, attractive and can provide maximum visibility when required. Fire Stations and Auto Service Centers are two example applications. Door frames come standard with a mill finish, Colors are available upon request, Bronze Anod-ized finishes are optional. Standard glass is 1/8" Colorful or clear annealed glass. Most other architecturally speci-fied finishes. Section of the door thickness is 5 cm.



Product Drawings

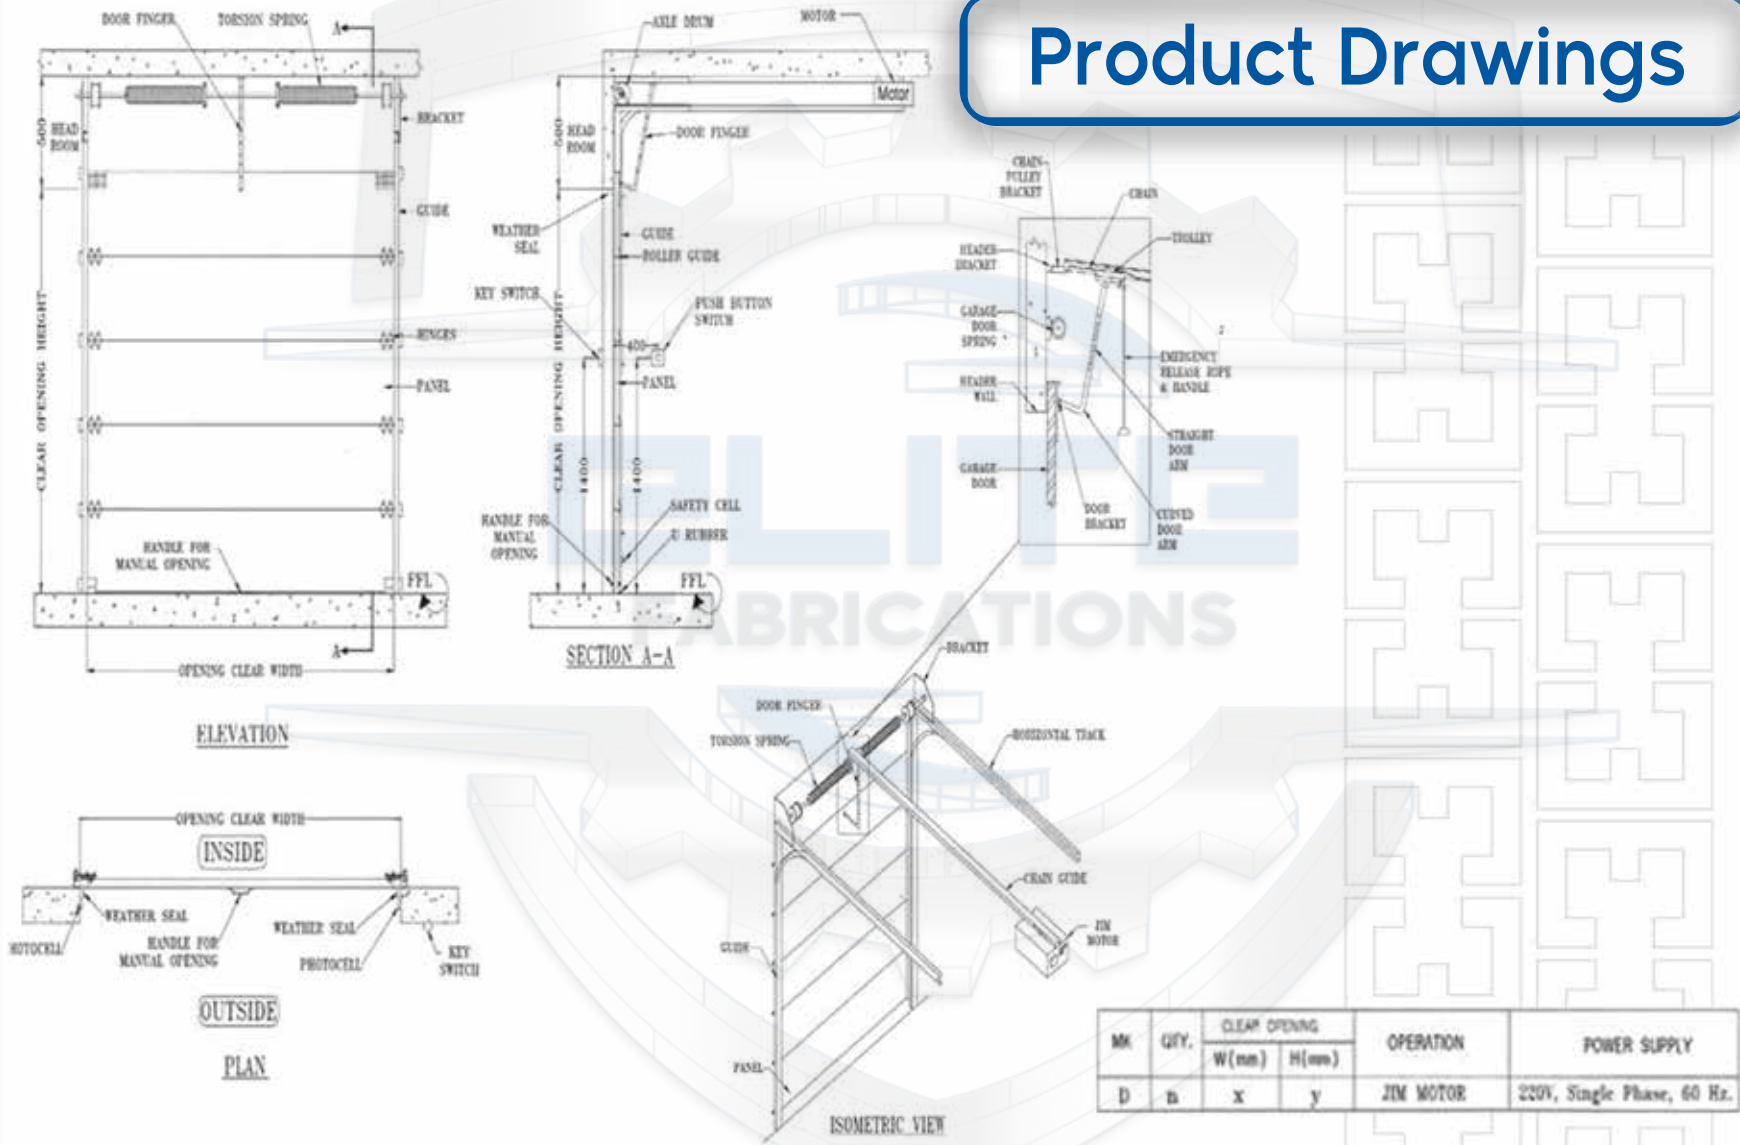

أبواب بولي كربونات

تتميز أبواب ايليت بولي كربونات الشفافة و المعزولة بـ

- المتانة والجمال و سهولة الاستخدام
- تتناسب مع أبواب المحلات والكافيهات و المراكز التجارية
- توفر أمان وإتاحة الفرص للعميل لعرض المنتجات
- تتيح لعملاء المحلات رؤية المنتجات وقت إغلاق المحلات
- تم تصميم الأبواب من البلاستيك المقوى بالألياف الزجاجية
- سماكة تتراوح بين 6 ملم إلى 8 ملم
- يمكن طلاء الأبواب بكافة الألوان حسب رغبة العميل
- يتم تصميم شريحة النهاية للباب من الألمنيوم ممزوجة
- بـ بر بلاستيك من الكاوتشوك لتحمل الضغط أثناء الإغلاق
- يمكن إضافة أقفال لزيادة الأمان مع اضافة صفائح
- سويتش داخلي وخارجي


Polycarbonate Doors

Transparent and Insulated Polycarbonate Elite Doors are characterized by durability, beauty, and ease of use. They are ideal for shop doors, cafes, and commercial centers due to the security they provide and the opportunity for customers to display products, allowing shoppers to view products even when the shops are closed.

These doors are made from fiberglass-reinforced plastic with a thickness ranging from 7mm to 10mm. the doors can be painted in any color according to the customers preference. The final strip of the door is designed from aluminum mixed with rubberized plastic to withstand the pressure of the door during the closing process. Additionally, locks can be added for enhanced security, along with internal and external switch keys



Product Drawings

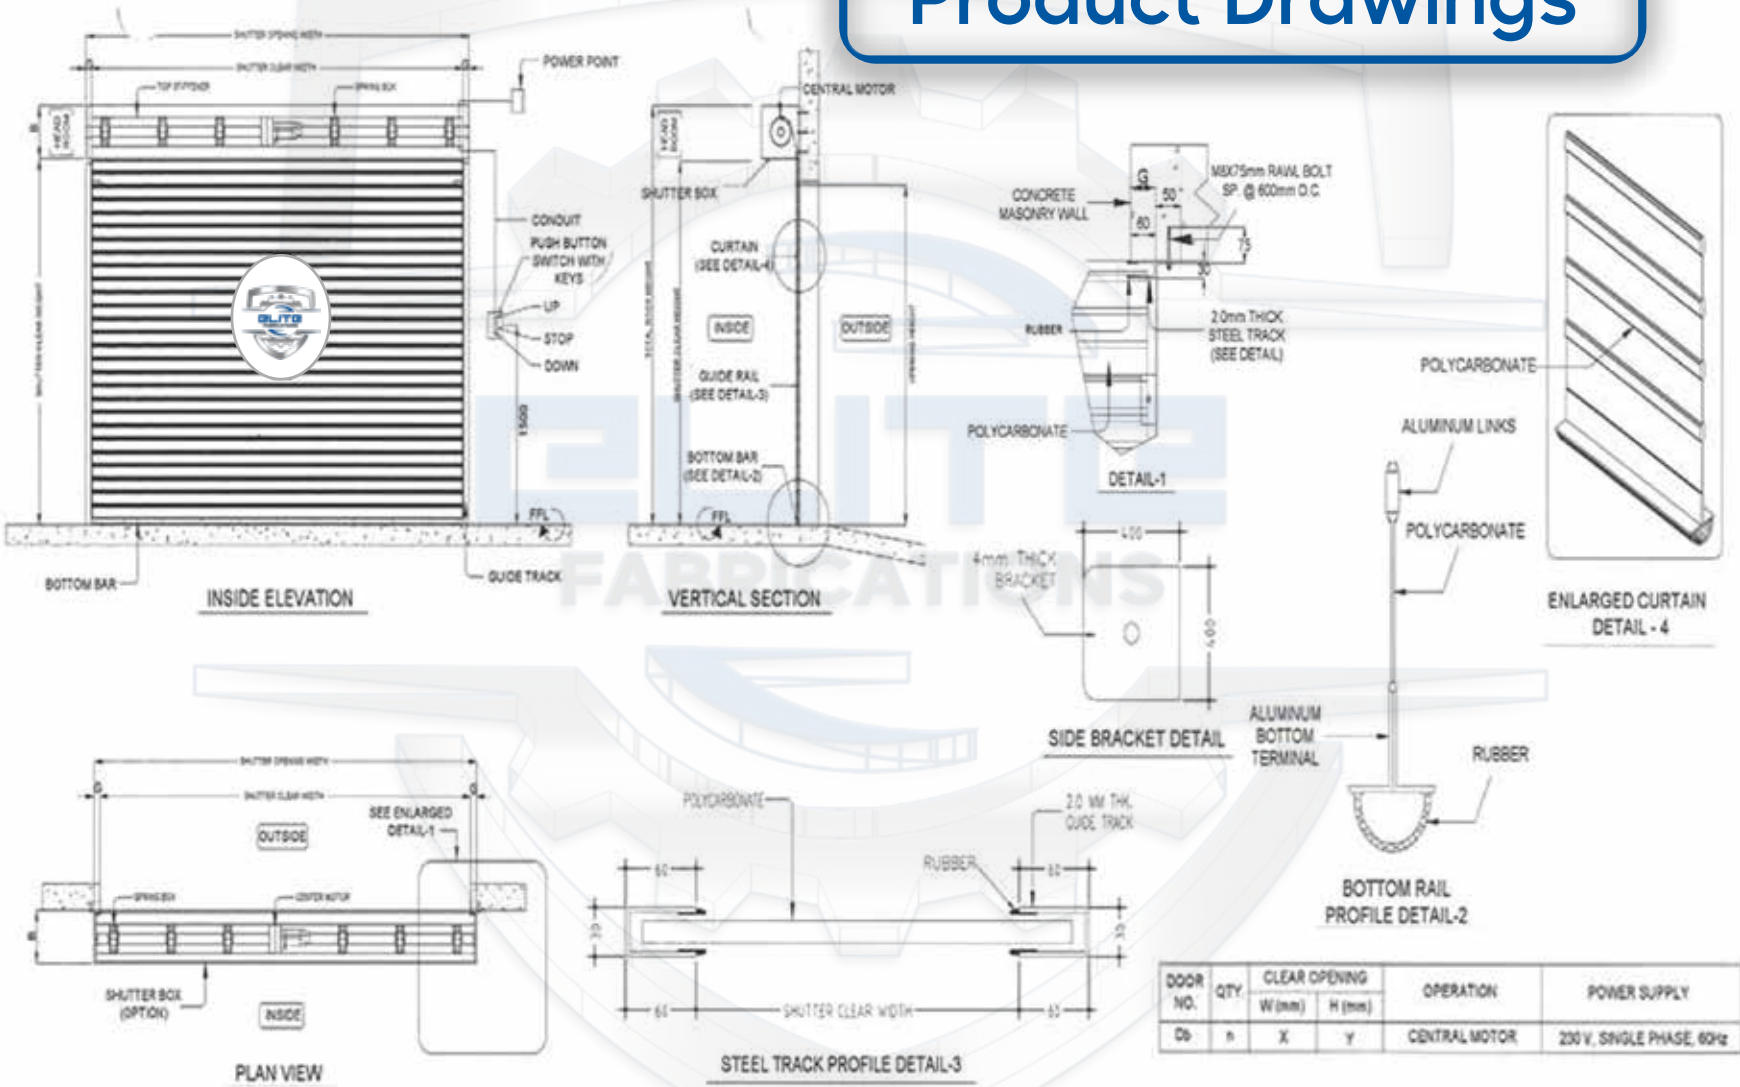

الاجهزة السلايدنج (الجانبي)

تتميز هذه للقدرة الهائلة على تحمل الضغط
و الاستخدام حيث أنها صناعة إيطالية (CAM) و منها



• جهاز سلايدنج BY-3500T



• جهاز سلايدنج BK


Operational Limits:

MODELS
Max. weight of leaf (kg)
Pinion module

Technical characteristics

MODELS
Protection rating (IP)
Power supply (V - 50/60 Hz)
Power supply to motor (V)
Maximum draw (A)
Power (W)
Maneuvering speed (m/min)
Cycles/Hour
Thrust (N)
Pinion module
Operating temperature
Motor's heat protection (°C)

BY-3500T
3500
6
BY-3500T
54
400 AC THREE-PHASE
400
8
1000
10.5
8
3500
6
-20 ÷ +55
-20 ÷ +55




Operational Limits:

MODELS	801MS-0070	801MS-0080	801MS-0090	801MS-0100	801MS-0120	801MS-0130
Max. weight of leaf (kg)	800	1200	1800	2200	2200	2200
Pinion module	4	4	4	6	4	6

Technical characteristics

MODELS	801MS-0070	801MS-0080	801MS-0090	801MS-0100	801MS-0120	801MS-0130
Protection rating (IP)	44	44	44	44	44	44
Power supply (V - 50/60 Hz)	230 AC	230 AC	230 AC	230 AC	230 AC	230 AC
Power supply to motor (V)	230	230	230	230	230	230
Absorption (A)	4.5	4.5	4.5	4.5	4.5	4.5
Power (W)	520	520	520	520	520	520
Maneuvering speed (m/min)	10.5	10.5	10.5	10.5	10.5	10.5
Thrust (N)	800	850	1150	1500	1500	1650
Pinion module	4	4	4	6	4	6
Operating temperature	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55
Motor's heat protection (°C)	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55

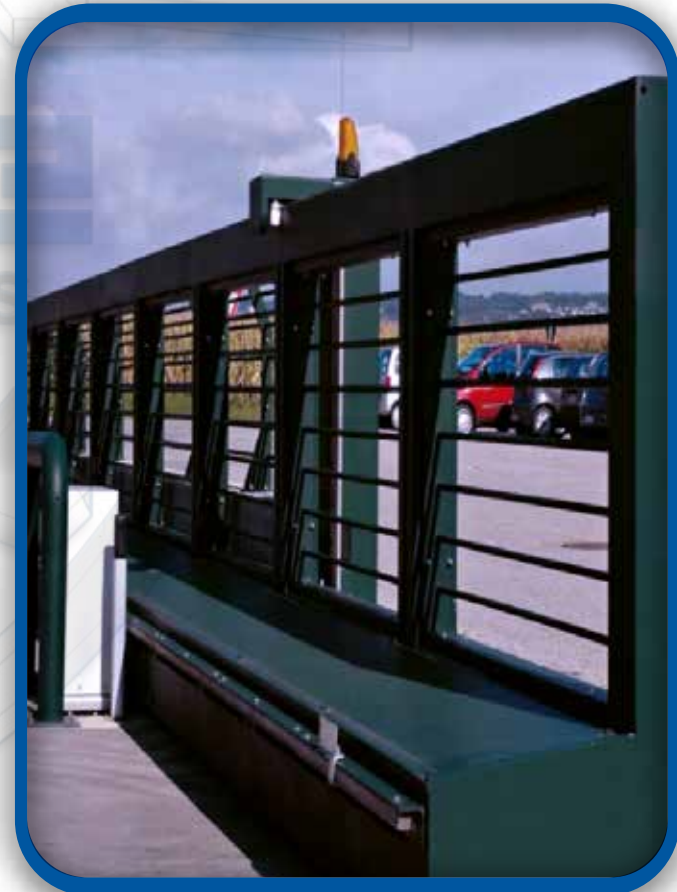




أبواب الدرفتين (ماتور الكافرات) Swing Gates (wheels motor)

- محرك بوابة السحب R50 هو محرك كهروميكانيكي قوي وموثوق، مصمم لأتمتة بوابات السحب في المنازل والمنشآت التجارية الخفيفة. يتميز بتشغيل سلس وهادئ، ويحتوي على خصائص تدعم حركة البوابة بشكل آمن وفعال وقد صمم لسهولة التركيب والأداء طويل الأمد، مما يجعله خيارًا مثاليًا لتعزيز الراحة والأمان في أنظمة البوابات الآلية

R50 Swing Gate

The R50 swing gate motor is a durable and reliable electromechanical actuator designed for automating residential and light-commercial swing gates. It offers smooth and quiet operation, with features that support safe and efficient gate movement. Engineered for ease of installation and long-term performance, the R50 motor is ideal for enhancing convenience and security in automated gate systems.

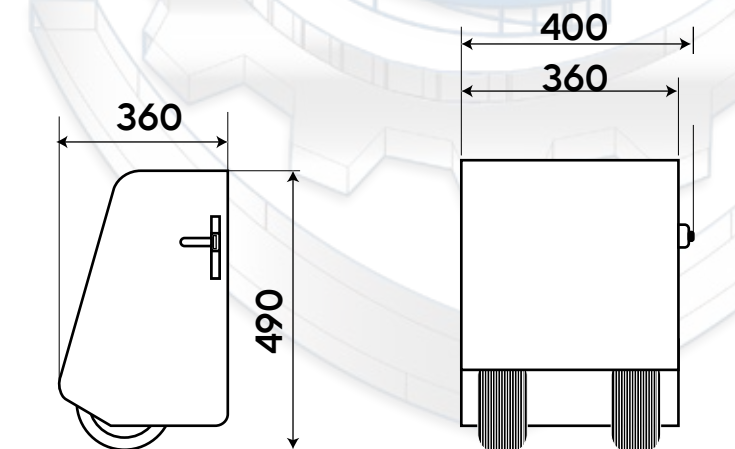

CARATTERISTICHE TECNICHE		R50	
Lunghezza max. anta	m	10	
Peso max cancello	kg	2000	
Tempo medio di apertura 90	s	78	
Coppia max	NM	57	
Velocità di traino	m/s	0.180 (50Hz) - 0.216 (60Hz)	
Alimentazione e Frequenza		230V - 50Hz	220V - 60Hz
Potenza Motore	W	437	511
Assorbimento	A		
Condensatore	uf	16	
Cicli normativi 230V-50/60/Hz	n°	3 - 78s/2s	
Cicli consigliati al giorno	n°	300	
Servizio	%	60	
Cicli consecutivi garantiti	n°	4/78s	
Lubrificazione a grasso		COMLUBE LHITGREASE EP/GR.S	
Peso motore	kg	45	
Temperatura di lavoro	°C	-10 ÷ +55	
Grado di protezione	IP	54	

الأجهزة الأبواب ذات الدرفتين

جهاز WINGO Hi-Speed Swing Gate Motor هو محرك عالي السرعة مخصص لأتمتة أبواب السحب ويتميز بأدائه الفعال و سرعته العالية في الفتح والإغلاق تم تصميمه للاستخدام السكني أو التجاري الخفيف، ويوفر حلولاً ذكية وأمنة للتحكم في حركة البوابات. يجمع بين التقنية المتقدمة وسهولة البرمجة مما يجعله مناسباً لمختلف احتياجات الأمان والراحة في أنظمة الدخول الآلي

Motor Operation for swing Gates

The WINGO Hi-Speed Swing Gate Motor is a high-speed motor designed for automating swing gates, offerible efficient performance and fast opening and closing. It is suitable for residential or light commercial use and provide smart, secure solutions for gate movement, Combining advanced technology with easy programming. it is ideal for various access control and safety needs in automated entry systems.



24 VDC Electromechanical Gear Motor With Magnetic Encoder

User Friendly Release With Key

Technical Specifications


Control Unit Specifications:

Supply:	29V AC (Low traffic applications only) 220V AC (Mandatory for high traffic applications)
consumption:	< 40 W (250VAC)
voltage:	24VDC
Heating temperature range:	-10 / + 50 °C
Crushing safety sensing:	Electronic load profiling
output for ancillaries:	Continuous 24V DC at 300mA Automatic overload protection
battery charging voltage:	27. 5V DC
format:	Keeloq [®] Rolling code
frequency:	433 . 92MHz
channels:	4 (Button trigger, Pedestrian, Holiday lock-out and receiver relay)
memory:	64 users standard x 4 channels
relay options:	Courtesy light mode, strike lock mode, magnetic lock mode or additional receiver relay mode



Motor Unit Specifications:

Code	WG3524HS
Electrical Data:	
Power supply (Vdc)	24
Absorption (A)	5
Power (W)	120
Performance Data:	
Speed (mm/s)	40
Force (N)	1500
Work cycle (cycle/hour)	30
Dimensional and General Data:	
Protection Level (IP)	44
Working temp (°C Min/Max)	-20/+50
Weight (kg)	6

Utilisation Limits:

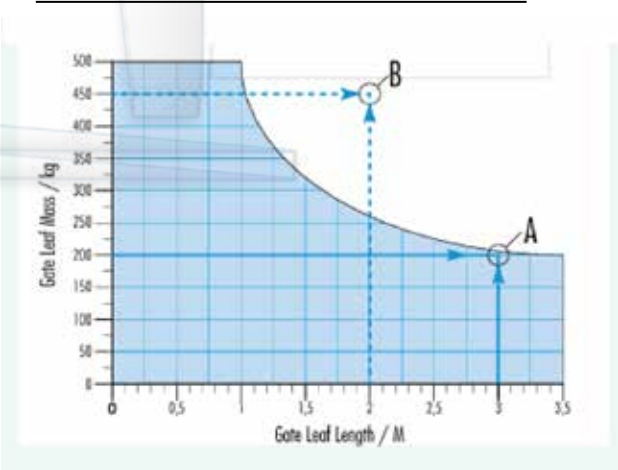

Dimensions and References

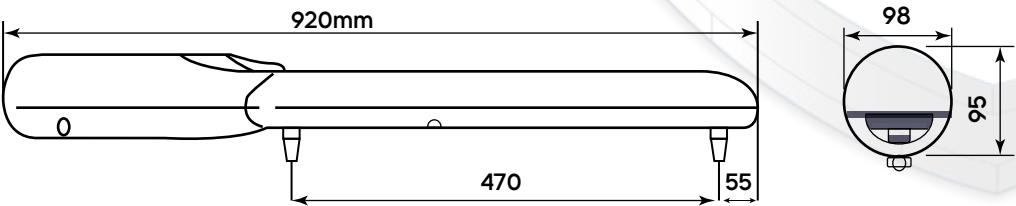

أبواب زجاجية على شكل أوراق درفتين

باب دورماكابا مصنوع من الألمنيوم المبتق، مصنوع من أعمدة وقضبان، مصمم للاستخدامات الداخلية والخارجية التي تتطلب فتحاً جزئياً للألواح المنزلقة فقط. يُنصح به للاستخدامات ذات الفتحات الكبيرة، حيث يسمح انخفاض تسرب الهواء بتحمل ظروف الرياح. متوفر بإطارات ضيقة ومتوسطة ومتوافق مع مجموعة متنوعة من خيارات الزجاج عالي الأداء.



Double-Leaf Glass Doors

The Dormakaba is an extruded aluminum stile and rail door designed for interior and exterior applications where partial breakable of sliding panels only is required.

Recommended for large opening application reduced air infiltration allows handling windy conditions. Available with narrow medium stiles, and compatible with variety of performance glass options.



Glass Motor Operation

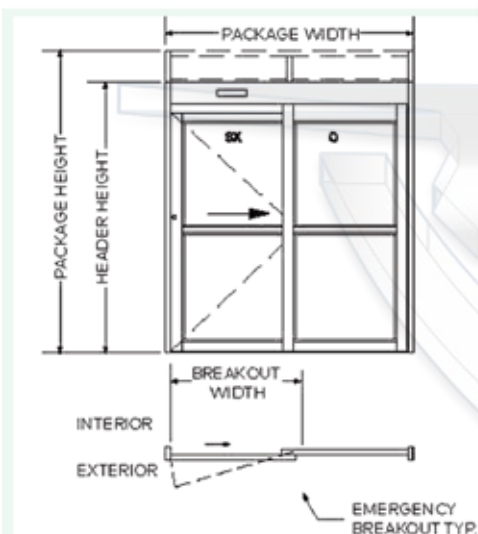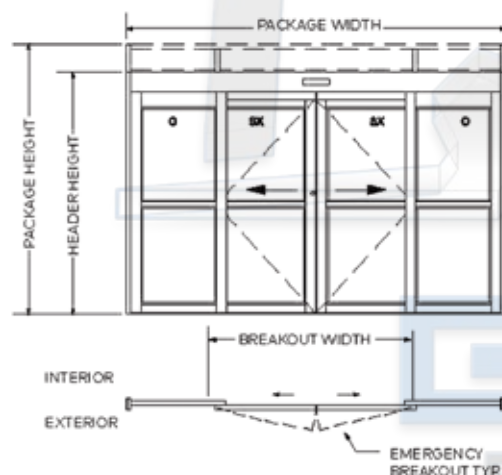

ESA200 Technical Specifications

Configuration

Standard finishes	Clear or Dark Bronze Anodized
Package height	up to 10'-0" (120")
Package height w/transom	up to 12'-0" (144")
Package width	[Single slide up to 9'-0"] (108") [Single slide telescopic up to 12'-0"] (144") [Bi-part slide up to 16'-0"] (192") [Bi-part telescopic up to 16'-0"] (192")

Door panels

2-5/8" Narrow stile
[Including 3/4" wide glass stop]
3-1/4" Muntin mounted at 41.75"
[Including 3/4" wide glass stop]
4" Bottom rail
[Including 3/4" wide Glass stop]

Jamb tubes

1-3/4" x 4-1/2" smooth or double pocket

Features

Vertical transom mullion	One (1-3/4" x 4-1/2")
Threshold	Surface mounted
Weather stripping	Brush
Glass stops	1/4" In door panels & transom

Power

Power supply	120 V +/- 10% 50/60 Hz
Internal power supply available for accessories	27 V DC / 2 A
Fuse	6.6 A not exchangeable
Power consumption	250 W (Max)

Features

Vertical transom mullion	One (1-3/4" x 4-1/2")
Threshold	Surface mounted
Weather stripping	Brush
Glass stops	1/4" In door panels & transom

Bi-parting narrow stile

	Minimum	Maximum
Overall frame width	8'-6"	16'
Rough opening width	9' - 6 1/2"	16 1/2"
Clear slide opening	42 5/8"	84-5/8"
Header height	7' 4-1/2"	10'
Rough opening height	7' - 5"	10' - 1/2"
Transom height	8"	24"

Bi-parting telescopic

	Minimum	Maximum
Overall frame width	13'	16'
Rough opening width	13'-1/2"	16'-1/2"
Clear slide opening	84"	108"
Header height	7' 4-1/2"	10'
Rough opening height	7'-5"	10'-1/2"
Transom height	8"	24"

Safety and security

Lock	Maximum security two-point mortise lock
Sensors	Two combination motion/presence sensors
Controller	Self-learning & self-monitoring microprocessor controller
Jamb mounted rocker switch panel	Auto-off – hold open Two way traffic – exit only Full open – partial open

Single slide narrow stile

	Minimum	Maximum
Overall frame width	6'-6"	9'
Rough opening width	6' - 6 1/2"	9' - 1/2"
Clear slide opening	32 7/16"	47-7/16"
Header height	7' 4-1/2"	10'
Rough opening height	7' - 5"	10'-1/2"
Transom height	8"	24"

Single slide telescopic

	Minimum	Maximum
Overall frame width	7'	12'
Rough opening width	7'-1/2"	12'-1/2"
Clear slide opening	44'-11/16"	84-11/16"
Header height	7' 4-1/2"	10'
Rough opening height	7'-5"	10'-1/2"
Transom height	8"	24"

أبواب الطوارئ (عادية) - ضد الحريق

تعد الخيار الأفضل لمخارج الطوارئ
وغرف الأشعة ودورات المياه وغيرها

وهي متوفرة بالأنواع التالية

- الأبواب الحديدية الجوفاء المقاومة للحريق
- الأبواب الحديدية الجوفاء العازلة للصوت والحرارة
- الأبواب المروحية العازلة للصوت والحرارة

Hollow Metal Doors

Hollow Metal Doors are most suitable for fire exit doors
Roof Exits, Radiology rooms, and Bathrooms Etc.

Available as following

- Hollow Metal Fire Rated Doors
- Hollow Metal non Fire Rated Doors with Polyurethane Insulation
- Hollow Metal Double Action Doors and with Polyurethane Insulation



الأمدة الإلكترونية لمواقف السيارات



الأمدة الإلكترونية لمواقف السيارات ، تمنع دخول وخروج السيارات إلا عن طريق حساسات أرضية أو ريموت أو بطاقة دخول صناعة إيطالية ذات قدرة تشغيل وتحميل عالية ، تتوفر بمقاسات مختلفة ٣ متر - ٤ متر - ٥ متر - ٦ متر - ٧ متر - ٨ متر ويمكن تشغيلها عن طريق قارئ الكروت لبوابة الدخول كما يمكن إضافة حساس أرضي لبوابة الخروج

Electronic Parking Barriers

Electronic parking barriers prevent the entry and exit of or access cards. Italian manufacture, offering high operational capacity and durability.

Available in various sizes : 3 meters, 4 meters, 5 meters, 6 meters, 7 meters, and 8 meters,



أجهزة اللستر للأبواب الشتر و الشبك

Central Motor For Rolling & Grill Shutter



TITAN 240 E

TECHINICAL SPECIFICATION

Power Supply	220V 60Hz
Torque	200 Nm
R.P.M	8
Limit Switch Range	6
Cut Out Temperature	4 Min
Power Absorbed	630 W
Consumption	2.7 A
Weight	10 Kg
Lifting	180 Kg
Tube Rolling Shutter	∅ 76
Pulley	∅ 240



UNITITAN-E

TECHINICAL SPECIFICATION

Power Supply	220V 60Hz
Torque	145 Nm
R.P.M	10
Limit Switch Range	6
Cut Out Temperature	4 Min
Power Absorbed	630 W
Consumption	2.7 A
Weight	9 Kg
Lifting	160 Kg
Tube Rolling Shutter	∅ 60
Pulley	∅ 200



TITAN 200 BME

TECHINICAL SPECIFICATION

Power Supply	220V 60Hz
Torque	260 Nm
R.P.M	10
Limit Switch Range	6
Cut Out Temperature	4 Min
Power Absorbed	1260 W
Consumption	5.4 A
Weight	14 Kg
Lifting	280 Kg
Tube Rolling Shutter	∅ 60
Pulley	∅ 200



TITAN 240 BME

TECHINICAL SPECIFICATION

Power Supply	220V 60Hz
Torque	400 Nm
R.P.M	8
Limit Switch Range	6
Cut Out Temperature	4 Min
Power Absorbed	1260 W
Consumption	5.4 A
Weight	17 Kg
Lifting	360 Kg
Tube Rolling Shutter	∅ 76
Pulley	∅ 240

الأجهزة الجانبية للأبواب الشتر و الشبك

Side motor single/three phase



Model : IP 600

(Rated-load 600kg, single phase/three
Phase 2 relay control circuit)



Model : IP 800

(Rated-load 800kg, single phase/three
Phase 4 relay control circuit)



Model : IP 800

(Rated-load 800kg, three phase
4 relay control circuit)



Model : 1/3P

(Rated-load 1000kg, single phase/three
Phase 4 relay control circuit)



Model : IP 1300

(Rated-load 1300kg / 1500kg, three
Phase contractor control circuit)



Model : IP 2000

(Rated-load 2000kg, three Phase contact
control circuit, out - door installation)

TECHNICAL PARAMETERS

SINGLE / THREE PHASE MOTOR SPECIFICATIONS

Model	Rated output torque (N.m)	Rated output torque (r/min)	Motor Power (W)	Rated Voltage Frequency (V/Hz)	Rated Current (A)	Con tinued work time (min)	Standard roll up parameter			Motor/ accessory weight (kg)
							Drum tube outer diameter (mm)	Miximum Lifting power (kg.f)	Miximum Lifting Height (m)	
									Profile thickness (mm)	
									10 20	

THREE PHASE 3P

P 600	412	4.8	220/50	3.3	5	140	600	6	6	12.5/16.5
P 800	647	4.1	220/50	4.7	5	165	800	7	6.7	14.2/26
P 1000	809	3.6	220/60	4.9	5	165	1000	6	8	14.2/31.5
P 1300	1401	5.6	380/50	3.2	5	220	1300	9.5	7	23.3/38.2
P 1500	1617	5.6	380/50	3.8	5	220	1500	12	7.9	24.4/44.5
P 2000	2450	3.6	380/60	4.1	5	250	2000	12	12	28.5/93

OUR CLIENTS

عملاؤنا



TAMER



مجموعة محمد يوسف ناغي وأخوانه
MOHAMED YOUSUF NAGHI & BROTHERS GROUP



سيرا
SEERA



National Food Industries Company Limited

Almosafer
المسافر

التوكيلات
ALTAWKILAT



DP WORLD

PETROMIN



UMA
التوكيلات العالمية للسيارات
Universal Motors Agencies



الفنية
Alfaneyah



AL BANDER

العشيم
Othaim

الطائر
al tayer



المجموعة الوطنية للإستزراع المائي



حوسبة
Hawsabah

OUR CLIENTS

عملاؤنا

36

آل سالم جونسون كنترولز
Al Salem Johnson Controls



عيادتي My Clinic

AREL
Where dreams come alive...



Alshaya Trading Co.

كمال عثمان جمجوم للتجارة ذ م م
Kamal Osman Jamjoom Trading LLC



BRANDS



LiftMaster



dormakaba



somfy

Nice



SERVICES

01

Custom Design & Installation

Tailored roll-up shutter doors for residential
Commercial, and industrial use.

- Solid & perforated slats
- Manual or motorized operation
- Remote control and automation options

02

Preventive Maintenance

Ensure long-term performance with regular
servicing:

- Full inspection
- Lubrication and tuning
- Component health checks

03

24/7 Emergency Repairs

Rapid response for urgent repairs:

- Motor issues
- Jammed doors
- Structural damage

04

Motorization & Upgrades

Upgrade manual doors to automated
systems:

- Modern motor systems
- Smart control integration
- Safety sensors

05

Security & Weather Protection

Enhanced security with:

- Reinforced locking systems
- Burglar-resistant features
- Wind and weatherproofing

06

Annual Maintenance Contracts (AMC)

Peace of mind with scheduled care:

- Priority service
- Cost-effective plans
- Increased lifespan of doors

خدماتنا

01

التصميم حسب الطلب والتركيب

- أبواب شتر قابلة للطبي مصممة خصيصا للاستخدام السكني والتجاري والصناعي.
- شرائح طلبة ومثقبة
- التشغيل اليدوي أو الآلي
- خيارات التحكم عن بعد والأتمتة

02

الصيانة الوقائية

- ضمان الأداء طويل الأمد من خلال الصيانة المنتظمة:
- الفحص شامل
- التشحيم والضغط
- فحوصات والتحقق من سلامة القطع المستخدمة

03

خدمة على مدار الساعة 24/7

- الاستجابة السريعة للإصلاحات العاجلة:
- مشاكل المحرك
- الأبواب العالقة
- الأضرار الهيكلية

04

التحويل إلى التشغيل الآلي والترقيات

- قم بترقية الأبواب اليدوية إلى أنظمة آلية:
- أنظمة محركات حديثة
- دمج التحكم الذكي
- حساسات أمان

05

الحماية الأمنية ومقاومة العوامل الجوية

- تعزيز الأمان من خلال:
- أنظمة إغلاق معززة
- ميزات مقاومة للسرقة
- مقاومة للرياح والعوامل الجوية

06

عقود الصيانة السنوية (AMC)

- راحة البال مع الصيانة المجدولة:
- الأولوية في الخدمة
- اقتصادية من حيث التكلفة
- زيادة عمر الأبواب الافتراضي



CONTACT INFORMATION



Head Office

Building # 7788, Prince Mutaib bin Abdul Aziz Road,
Arbaeen Street, Al Aziziya – Jeddah – 23342 – 3286.



+966 59 090 0848

+966 55 11 4 7133

Factory Address :

Building No. 7450 – 2839 Asfan – 25561
Kingdom of Saudi Arabia



sales@eliteautodoors.com



www.eliteautodoors.com